Govt. Ptr.—45,004—14-11-29.

Local Self Government (1930) Department.

M.S. SERIES.

G.O. No. 595 P. H.

DATED 15 - 3 - 1930.

[Despatch Abstract.]

Water Supply - Bellary - Extension of Distribution System to Brucepet - Plans and Estimates - Sanctioned.

C.F. 30—10,000—31-1-27.

DEPARTMENT.

SECRETARIAT GOVERNMENT
1929
DEPARTMENT

Received ... 192 . *Registered* 45561 ... 192 .

Subject

Requesting to permit the Municipality to carry on the extension scheme of the Water Works under the supervision of the Sanitary Engineer.

ENCLOSURES.
No. ...
Spare copies ...

My Cir. No. 1960
7-11-29

Station Bellary. *Dated the* 6th November 192 9.

M. R. Ry,

From-(Name) V. Narayana Rao Garu. B.A., B.L.,

(Designation) Chairman, Municipal Council.

To The Secretary to the Government of Madras,

Local Self Government Department.

Madras.

The plans and estimates for the extension of the Bellary water supply are likely to be made ready and sanctioned by the Sanitary Engineer at an early date. The cost of the scheme is below one lakh of Rupees and the Council has in its service a Special Engineer who is competent to carry out the scheme under the supervision of the Sanitary Engineer. I request the Government to kindly allow the work to be executed by the Municipality; otherwise enormous delay would be the result.

Narayana Rao
Chairman, M.C.

6/11.

7/11/29

50/19/11

L Sg (Pt) Dopr

C nº 45561 from the C.O.C. Bellary nº 1900 d 7-11-29

+ O.M. 19/11 Hands

Copies sent 19/11/29

Subject

Water Subply Scheme - Extension to Bruceopet - Execution by Municipal Agency

Memo nº 45561- C2/Pt d 19-11-29

Referred to the San. Engr. for his very early remarks. He is requested to state whether the plans and estimates for the above Scheme are ready and whether the M.C. may be permitted to execute the work through its own agency. He is requested to submit his reply to Govt through the Chief Engr.

to
the San. Engr
The Chief Engr (a/c)

ASPS
18/11/29
KB
18/11/29

H 19/11/29

2

Dpd. by Van
Dpr's. initials.
Date 20/11/29

VERY URGENT

C F. 32.

In reply, please quote number, date and short title.*

WATER WORKS DEPARTMENT.

Received ..... *Registered* .....

53438

From (Name) M.R.Ry.N.Narayana Rao Garu, B.A., B.L.,

(Designation) Chairman, Municipal Council,

Post Box ....., (Station) B e l l a r y.

Telegraphic Address Council.

SECRETARY TO GOVERNMENT. 11.12.1929 LOCAL SELF-GOVERNMENT DEPARTMENT

To The

Secretary to Government,
Local Self Government Department,
M a d r a s.

No. 4704 *dated* 7-11 1929.

Sir,

ENCLOSURES .....

.....

.....

SPARE COPIES .....

Subject:- Extension of the Water Scheme to portions of Brucepet.

Reference:- My letter G.C.R.1960/7-11-1929.

I have received from the Sanitary Engineer to Government, a plan and an estimate amounting to ----- Rs.58,000/- for the extension of pipe lines in Brucepet area.

But I regret to note that I have not yet received any reply from you regarding the request contained in my letter G.C.R.1960/7-11-1929, to have the work ----- executed by the Municipal Staff. The Sanitary Engineer too has allowed only 2½% as centage in the estimate, -- instead of the usual 15½% so that the work might be put into execution by the Municipality.itself.

The Council is prepared to spend Rs.29,000/- (ie.,) its share of the cost almost immediately, as the people are clamouring very much for want of adequate supply of water though they are paying water tax.

In view of the urgency of the matter, I request that immediate orders may be passed, so that I might put the work into execution atonce.

GK.

Narayana Rao
C h a i r m a n.
30/11/29

OFFICE OF THE CHIEF ENGINEER, P.W.D. BUILDINGS AND ROADS
No. 5913
21 NOV 1929

GOVERNMENT OF MADRAS

LOCAL SELF GOVERNMENT DEPARTMENT.

MEMORANDUM:-- No. 45561-1-D2/P.H. dated 19th November 1929.

'From the Chairman, Municipal Council, Bellary No.1960 dated 7th November 1929.

SUBJECT:-- Water Supply Scheme - Extension to Brucepet - Execution by Municipal Agency.

Referred to the Sanitary Engineer for his very early remarks. He is requested to state whether the plans and estimates for the above scheme are ready and whether the Municipal Council may be permitted to execute the work through its own agency. He is requested to submit his reply through the Chief Engineer.

S. Ranganathan
Deputy Secretary to Government.

To
The Sanitary Engineer,
The Chief Engineer.

FORWARDED
(By Order)

Superintendent.

C.C.

D.C.E.
The receipt of reply from the San'l Engr may be awaited till 15.12.29

22.11.29

22/11

5

Copy of letter from the Chairman, Municipal Council, Bellary No. 1960 dated 7th November 1929.

The plans and estimates for the extension of the Bellary water supply are likely to be made ready and sanctioned by the Sanitary Engineer at an early date. The cost of the scheme is below one lakh of rupees and the Council has in its service a Apx Special Engineer who is competent to carry out the scheme under the supervision of the Sanitary Engineer. I request the Government to kindly allow the work to be executed by the Municipality; otherwise enormous delay would be the result.

PTO

C.F. 32.

In reply, please quote number, date and short title.

Public Works DEPARTMENT.

Received 6 *Registered* 3

From (Name) J.S. Westerdale Esq., B.Sc.,M.Inst.C.E.,

(Designation) Sanitary Engineer to Government,

Post Box ....., (Station) Triplicane,Madras.

Telegraphic Address Santenger.

OFFICE OF THE CHIEF ENGINEER, P.W.D. No.6009 27.NOV 1929 BUILDINGS AND ROADS

To The Chairman, Municipal Council,

Bellary.

No. 2462 M, *dated* 26th November 1929.

Sir,

Enclosures .....

....

.. ..

Spare Copies .....

Bellary water works - Extensions in Brucepet area.

Re: correspondence ending with your No.1960 dated 6th November 1929, plan and an estimate amounting to Rs.58,000 for the extension of pipe lines in Brucepet area are enclosed.

The request contained in para 2 of your No.1960 dated 6-11-1929 is being forwarded to Government for consideration.

J.S.Westerdale,

Sanitary Engineer to Govt.

725 G.
26-11-29

Copy forwarded to the Secretary to Government, Local Self Government Department with reference to Memo No.45561-1-D2-P.H. dated 19-11-29. The Municipal Council of Bellary has in its service a qualified Engineer for its water works who is competent to carry out this extension of pipe lines. I therefore recommend that the Municipal Council may be permitted to execute the work by its own agency under the general control of the Sanitary Engineer.

The reduction in the amount of the estimate, below the approximate figure of Rs.79,500 given in Memo No.37732-2-D2 P.H. dated 12-12-1928 is due to the adoption of the current rates for cast iron pipes and the provision of

only 2½% for centage charges as against 15½% originally allowed in view of the recommendation above made for the execution of the work by the Council itself.

S. Vesta Clerk
22/11/29.

Sanitary Engineer to Govt.

To

The Secretary to Government, Local Self-Govt. Dept.

Through the Chief Engineer, P.W.D.

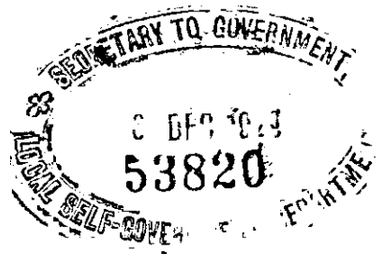

DSR/22-11-29).

Office of the Chief Engineer (E RMB)

Endt No. 5913 Whs/29 CE

4-12-29

Forwarded.

K.D. Slowey 2/XII/29
Chief Engineer

MRB 29/11/29

To The Secretary to Govt L.S.G. dept

Col'l to be
1/12
Encl
11/12

Report to accompany the estimate for extension of pipe lines in Brucepet, Bellary water works improvements.

In G.O.No. MS.1797 P.H. dated 18-7-1929 the proposal to lay new mains and open additional fountains at a cost of about Rs 79,500 in Brucepet and the areas close by was approved by Government, and the preparation of detailed plans and estimates approved. The estimate accompanying provides for this work.

The proposal is to open 45 new fountains as shown in plan San.No.107/29. Of these two fountains Nos. 46 and 49 will be on mains already laid, eleven fountains Nos. 15, 17, 18, 19, 20, 21, 23, 26, 26(a), 27 and 44(a) will be on extensions that had already been indicated, in the original scheme for Bellary water supply and the remaining 32 fountains on new lines now proposed. Most of the latter are merely connecting pipes joining existing mains.

The above proposals involve the laying of 1340 feet of 4" pipes and 27,550 feet of 3" pipes. These will be of C.I. B.Class of the B.S.Specification. Necessary specials such as branches, bends, tapers, collars, etc. are also allowed in the estimate.

The fountains will be of the standard design drawing No. 5 B. Five scour valves have also been provided at suitable places and should be constructed in accordance with the Sanitary Engineer's standard design plan San. No. 3/1927. The connections to fountains at the tail end of mains should be in accordance with plan San. No. 39/1926. The pipes should be laid, jointed and tested in accordance with the Sanitary Engineer's standard specification.

The cost of the work as now estimated is Rs 58,000. The reduction is due to the adoption of current rates for C.I. pipes and the provision of only 2½% for centage charges as against 15% allowed in the approximate estimate as the work is proposed to be carried out by the Municipal Council.

(Sd) J. Hoshendale
22.11.29

Sanitary Engineer to Govt.

(Brucepettah Extension

~~P.W.D. Abstracts Extension~~)

Item number.	Quantity.	Description of work.	Rate.	Per	Amount	Total.
(1)	(2)	(3)	(4)	(5)	(6)	(7)
		Distribution System.	RS.		RS.	RS
11.75	Tons.	Supply & delivery of 4" C.I.pipe B class spigoted & socketed.	154/-	Ton	1810	
180.75		-do- -do- 3" -do-	154/-		27836	
82.57	cwt	-do- C.I. specials.	18/4	Cwt.	1507	
5	Nos.	Supply & delivery of 3" x 3" branch with spigot & socket ends on main and flanged on branch.	14/-	Each	70	
10	"	-do- 3" pipe 1'6" long one end flanged and other socket.	10/-	"	100	
5	"	-do- 3" pipe 4'3" long one end flanged and other spigot.	15/-	"	75	
5	"	-do- 3" ¼ bend -do-	18/-	"	90	
5	"	-do- 3" special bend for scour.-do-	35/-	"	175	
5	"	-do- 2" Galvanized iron bend for end formations	2/-	"	10	
281.67	Units.	Excavation & refilling for pipes.	10/-	Unit	2817	
1340	Rft.	Laying 4" C.I. pipe.	0-1-3	Rft.	105	
27550	"	-do- 3" "	0-1-0	"	1722	
6	Nos.	Jointing 7" C.I.pipe with lead & flanged pipes with washers etc. complete.	3/8	each	21	
3	"	-do- 6" -do-	3/-	"	9	
12	"	-do- 5" -do-	2/8	"	30	
184	"	-do- 4" -do-	2/-	"	368	
3314	"	-do- 3" -do-	1/8	"	4971	
1	"	Supply & delivery of 4" sluice valve with tail pieces inclusive of surface box and fixing in masonry pit.	105/-	"	105	
32	"	-do- 3" -do- -do-	90/-	"	2880	
5	"	-do- 3" -do- without tail pieces including necessary piping, surface box and fixing in masonry pit.	95/-	"	475	
45	"	Providing single tap fountains/per as separate estimate.	125/-	"	5625	
		Opening out the existing main, making connections & sundries.			217	
L.S.		Reforming road surface after laying pipes.			1300	
		Unforeseen works at about 4%.			2081	
		Contingencies at 5%.			2601	
		Centage charges @ 2½% for preparation of plans & estimates in Sany.Engr.'s Office.			1300	
		Grand total of estimate ...				58000/-

(Sd) J.S.Wood Fell 22-11-29

Executive Engineer.

Sanitary Engineer to Govt.

P.W.D. V.14—89,928—30-5-28 (b)

E. No. 32

CIRCLE—

DIVISION—

DISTRICT—

TALUKS (OR ESTATE IN CASE OF ESTATE WORKS).

ESTIMATE FORM—Abstract.

Financial head—

Budget head—

Departmental head—

Main head—

Sub-head—

Project of which
the work forms part—

Section—

Name of work -

Amount of estimate, Rs.

To be carried out by—

REFERENCES.

P.W.D. V-13—26,050—30-6-28 (5).

E. No. 31 - Intner.

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work. (3)	Rate. (4)	Per (5)	Amount (6)	Total (7)
			Rs.		Rs.	Rs.
		Providing a Single Tap Fountain.				
		Pipes etc.required for a Single Tap Fountain.				
	15 Rft.	2" W.I. tube galvanized	0-9-3	Rft.	8-10-9	
	1 No.	2"x1½" -do- reducing coupling galvanized.	0-13-0	each	0-13-0	
	1 No.	½" Gun metal stop cock.	12/-	"	12- 0-0	
	1 No.	Surface box for stop cock similar to Browns patent No.B.iiP.page 16 Section D of Glenfield & Kennedy's catalogue of 1923.	7/-	"	7-0-0	
	6 Rft.	1½" W.I. tubes galvanized.	0-7-0	"	2-10-0	
	9" "	¾" -do- -do-	0-4-0	"	2- 4-0	
	1 No.	1½" x ¾" reducing elbows galvanized.	0-13-6	"	0-13-6	
	2 Nos.	¾" elbows galvanized.	0-4-3	"	0- 9-6	
	1 No.	½" Waste-not self closing extra strong galvanized iron valve similar to Fig.198/15 page 305 of Messrs. Tylor & Sons. catalogue, 18th Edn.	14/-	"	14/-	
		Sundries.			0-3-3	
		Total.				49-0-0
		Erecting a Single Tap Fountain as per drawing No.S.E. including valve pit for stop cock.				
	28 Cft.	Excavation.	10/-	Cft. 1000	0-4-6	
	6 "	Concrete broken stone in surki mortar	33/-	100	1-15-8	
	7 "	-do- in cement.	60/4-	"	4-3-6	
	36 "	Coursed rubble 1st sort in surki mortar.	41/-	"	14-12-2	
	0.5 "	Dressed cut stone granite	1-4-0	Cft.	0-10-0	
	70 Sft.	Plastering with cement ½" thick.	8/-	Sft. 100	5-9-7	
	6 Rft.	Cornice work.	1/-	Rft.	6-0-0	
	15 Rft.	Laying & jointing 2" W.I.tubes with bends etc.including excavation for pipe	0-2-0	"	1-14-0	
	6 "	-do- 1½" -do-	0-1-3	"	0- 7-6	
	9 "	-do- ¾" -do-	0-1-0	"	0- 9-0	
					35-6-11	49/-

C.O

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work. (3)	Rate. (4)	Per (5)	Amount (6)	Total. (7)
			Rs.		Rs.	Rs.
		B.F.			36-5-11	49/-
45	Cft.	Gravelling 4" thick in front and sides of fountain.	8/-	Cft. 100	3-9-7	
No.1		Fixing Tylor & Sons. Waste-not Iron Valve.	3/-	each	3-0-0	
		Fixing 1¼" Stop cock.				
5	Cft.	Excavation for stop cock pit	10/-	Cft. 1000	0-0-10	
1	"	Concrete broken stone in surki mortar.	33/-	"	0-5-3	
3	"	Coursed rubble 1st sort in surki "	41/-	"	1-3-8	
0.38	"	Cover slab.	1-4-0	Cft.	0-7-7	
No.1		Fixing surface box	5/-	each	5-0-0	
		Leading spill water to the existing drain or providing filter trenches.			25/-	
		Sundries.			0-15-2	

		Total cost of erection ...			76-0-0	76/-

		Grand total of estimate for providing one single tap fountain.				125/-
						=====

P.W.D. V.13—26,050—30-6-28 (5).

ESTIMATE FORM—Abstract.

Item number. (1)	Quantity. (2)	Description of work. (3)	Rate. (4)	Per (5)	Amount (6)	Total (7)
			Rs.		Rs.	Rs.
		Data for sluice valves.				
		Fixing 4" sluice valve in masonry pit.				
37	.40 Cft.	Earthwork excavation.	10/-	Cft. 1000	0-6-0	
5	.45 "	Concrete broken stone in surki mortar	33/-	100	1-12-9	
9	.79 "	Coursed rubble 1st sort in surki "	41/-	"	4- 0-2	
2	.81 "	Cover slabs and bed stones.	1/8-	Cft.	4- 3-5	
		Add for fixing valves & surface boxes.		L.S.	8- 9-8	
		Total			19- 0-0	
		Fixing 3" sluice valve in masonry pit.				
32	.12 Cft.	Earth work excavation.	10/-	Cft. 1000	0-5- 2	
4	.88 "	Concrete broken stone in surki mortar	33/	100	1-9- 9	
7	.73 "	Coursed rubble 1st sort in surki "	41/-	"	3-2- 9	
2	.33 "	Cover slabs and bed stones.	1/8-	Cft.	3-7-11	
		Add for fixing valves and surface boxes.		L.S.	7-6- 5	
		Total ...			16-0-0	
		Cost of 4" sluice valve with tail pieces inclusive of surface box and fixing in masonry pit.				
		Cost of 4" sluice valve with tail pieces as per quotation.			60-0-0	
		Cost of surface box for sluice valve.			26-0-0	
		Fixing sluice valve in masonry pit.			19-0-0	
		Total ...			105-0-0	
		Do. 3" Sluice valves.				
		Cost of 3" sluice valve with tail pieces as per quotation.			45-0-0	
		Surface box for sluice valve.			26-0-0	
		Fixing sluice valve in masonry pit			16-0-0	
		Sundries.			3-0-0	
		Total			90-0-0	

ESTIMATE FORM—Abstract

Item number. (1)	Quantity. (2)	Description of work. (3)	Rate. (4)	Per (5)	Amount (6)	Total. (7)
			Rs.		Rs.	Rs.
		Cost of 3" sluice valve without tail pieces including necessary piping, surface box and fixing in masonry pit.				
		Cost of 3" sluice valve without tail pieces as per Quotation.			32/-	
		Surface box for sluice valve			26/-	
		Fixing sluice valve in masonry pit.			16/-	
		Cost of 18'-0" length of 3" piping (2.304 Cwt.) at 7-8-0 a Cwt.			17/5-	
		Add for cartage, jointing & laying of pipes etc. and Sundries.			3/11-	
					95/-	

Name of Taluk.

C.F. 152.

Name of Work. Bellary Water Works Improvements (Brucepettah Extensions)

ESTIMATE FORM—Detail Measurements.

Detail of work. (1)	Number. (2)	Measurements in feet. Length. (3)	Breadth. (4)	Depth. (5)	Area or contents. (6)	Total quantity of each description of work. (7)
Distribution System.						
Supply & delivery of 4" C.I. pipe 9' long spigoted & socketed B.Class.						
4" pipe	1	1340				
Add 2½% for breakage		34				
		1374 or 153 pipes.				
	153 x 1.536 Cwts.				235.008	11.75 Tons
Supply & delivery of 3" C.I.pipes B.Class.						
3" pipe 9' long spigoted and socketed.	1	27550				
Add 2½% for breakage.		689				
		28239 or $\frac{28239}{9}$ = 3138 pipes				
	3138 x 1.152 Cwt.	3614.976				180.75 Tons
Supply & delivery of C.I.specials.						
Branches 7" x 3" for sub-main	2	1.50 Cwts.			3.00	
" 6" x 3" "	1	1.18 "			1.18	
" 5" x 4" "	1	0.99 "			0.99	
" 5" x 3" "	3	0.94 "			2.82	
" 4" x 3" "	9	0.63 "			5.67	
" 3" x 3" "	24	0.50 "			12.00	
Branch 4" x 2" for fountain.	3	0.58 "			2.90	
" 3" x 2" "	36	0.45 "			16.20	
3" ¼ bend including those for scour.	22	0.69 "			15.18	
" 1/8 "	3	0.50 "			1.50	
" 1/16 "	4	0.44 "			1.76	
" 1/32 "	2	0.40 "			0.80	
Taper 4" x 3"	1	0.44 "			0.44	
3" x 2"	5	0.40 "			2.00	
Collars to suit 7" pipe	2	0.75 "			1.50	
6"	1	0.64 "			0.64	
5"	4	0.53 "			2.12	
4"	9	0.43 "			3.87	
3"	25	0.32 "			8.00	
					82.57	

Name of Taluk.

46

C.F. 162.

Name of Work.

ESTIMATE FORM—Detail Measurements.

Detail of work. (1)	Number. (2)	Measurements in feet. Length. (3)	Breadth. (4)	Depth. (5)	Area or contents. (6)	Total quantity of each description of work. (7)
Supply & delivery of 3" x 3" branch with spigot and socket ends on main and flanged on branch.						5 Nos.
-do- 3" pipe 1'6" long one end flanged and the other socket.						10 "
-do- 3" pipe 4'3" long one end flanged and the other spigot.						5 "
-do- 3" ¼ bend one end flanged and the other spigot.						5 "
-do- 3" special bend for scour one end flanged and the other spigot.						5 "
-do- 2" galvanized iron bend for end fountain.						5 "
Earthwork excavation & refilling:						
4" C.I. pipe	1	1340				
3" "	1	27550 / 28890			x 9.75 Cft.	281678 Cft.
Laying C.I. pipes.						
4" C.I. pipes	1	1340				1340 Rft.
3"	1	27550				27550 "
Jointing C.I. pipe with lead and also flanged pipe & specials.						
7" pipe (2 + 4)	6					6 Nos.
6" " (1 + 2)	3					3 "
5" " (4 + 8)	12					12 "
4" " (149 + 9+5+1+18 +1+1)	184					184 "
3" pipe (3061+63+36+34+3+50+22 2 +36+7)	3314					3314 "
Supply & delivery of 4" sluice valve with tail pieces inclusive of surface box and fixing in masonry pit.						1 No.
-do- -do- 3" -do-						32 Nos.
-do- -do- 3" for scour without tail pieces -do-						5 "
Providing single tap fountain with necessary piping, masonry etc. complete as per separate estimate.						45 "

17

CW 53820

S.G (Pt) Dept

Subject

Water Supply - Bellary - Extension of distribution system to Bmcahet.

A.S.1

(B) In G.O No 1797 Pt d 18-7-29 Govt sanctioned the preparation of plans and estimates for a scheme to extend the water supply distribution system of Bellary to Bmcahet. The scheme was then estimated to cost Rs. 79,500 only. The San. Engr has now submitted a detailed estimate which amounts to Rs 58,000 only. This reduction in cost is reported to be due to the adoption of current rates for C.I. pipes and the provision of only 2½ p.c. for centage charges as against 15½ p.c. allowed in the approximate estimate. The centage charges have been reduced in anticipation of sanction of Govt to entrust the execution of the work to municipal agency. This proposal is recommended by the San. Engr who reports that the Council has in its service a qualified Engineer who is competent to carry out the work. The Chief Engr through whom the estimates have been forwarded has offered no remarks on the proposal. Apparently he has no objection to its being entrusted to Municipal agency. In the case of similar proposals relating to Tanjore and Dindigul

Water works improvements, the decision of the Cabinet as being awaited

|| order has been issued in the case of Jangpura Area - Rs. 46

(N) 7-1-30 Passed by Finance

2. Under the Cabinet order dated 22.6.1923 it has been laid down that "for the present Public works dept should be employed in connection with all schemes." In this connection the then Hon'ble Finance Member Sir Charles Todhunter observed as follows: "... If Govt had to pay half or more than half of the whole cost of the works, then must take steps to ensure that their money is properly spent, and the normal way of taking such steps is to require supervision by the Public works dept. In these circumstances there seems to be no question that the Public works dept must be employed." It is submitted that in the Case now under consideration the work will be supervised by the San'y Engr. Further, the Govt grant will be given only on the post payment system and after the Sanitary Engineer has certified to the effect that the works has been properly carried out. In the above circumstances there seems to be no objection to the Council's request being complied with. The remarks of the P.W.D and Fin depts may be invited to the above proposal.

17 g (D)

× Execution of water supply and drainage schemes.

para 3 and 5 g (D)

SECRETARIAT TO GOVERNMENT 24677 C 14 DEC 1929 IR DEPT

√ Sq Pr 45561-2 D/2 pt

13-12-29

BPK 9/12/29 9/12

KW 12/12

PWD Fin } no.

P

Please see the last sentence of paragraph 1 of the P.W.D. note at the 1-2 ante. It seems that the orders of the Cabinet on similar proposals referred to therein may first be awaited. In other respects the file may be passed on to the Finance Dept.

P.W.D. 21.1.29

P.W.D. 21-1-29

P.W.D. no. 24677 C/28
3.1.30

ASST SECRETARY TO GOVT.
3- JAN 1930
FINANCE DEPT.

70

Finance (Exp)

Submitted that this dept. may agree with P.W. & L. and the case returned to L.S.G.

R.J. 3.1.30

L.S.G. n/o

V.Z.L. 4.1.30

Fi no. 70 Exp/30
4-1-30

SECRETARY TO GOVERNMENT
4- JAN 1930

L.S.G. (P.H.) Dept.

BOM 4/1

The Cabinet has since approved the proposal to entrust the execution of the Tanjore Water Works Improvement Scheme to Municipal Agency

orders issued in G.O. 46 P.H. dated 7-1-30.

and orders are being issued accordingly. Ro. 40 PH 7-1-30 (IV)
The file relating to Sindipet is still in Circulation. Since the Bellary M'cl requests GOM to issue early orders in the matter it is stated that necessary sanction may be given to have the Scheme executed under ~~Constitution~~ executed by municipal agency also. If So a draft order is sent for approval. It may be sent to P.W.D and Finance Depts for acceptance.

P.W.D.
Sec

SECRETARY TO GOVERNMENT
8-JAN 1930
405
PUBLIC WORKS DEPT.

P.W.D
6/1/30
7.1.30

PW to Dept

LSG M
45561-3D2 PH
7-1-30
W1

Please see the draft order. The work will be executed by the Municipal Council subject to supervision by the ~~Supply~~ Sanitary Engineer. Please see in this connection the note ~~draft~~ 68 to 71 of form 1330 PH of 27.5.29. (A)
No special supervision will be required & no charges will be charged for the supervision in such cases.
by the ~~Supply~~ Sanitary Engineer. The draft order may be accepted and the file passed on to the Finance Dept

SECRETARY TO GOVT.
15 JAN 1930
FINANCE DEPT

PW No 405 c/30
15-1-30

10/1/30 10/1

PH 15-1-30

15.1.30

Pkt
15-1-30

D ✓ 21 S

Finance (Exp.)

Submitted that the draft orders may be accepted.

2. With reference to the Cabinet decision dated 22-6-23, the orders of the Cabinet for the execution of the work by Municipal agency should be obtained before the G.O. is issued. (Similar orders were obtained recently in the case of the Rangoon water works improvement scheme)

extracts at flag (F)

orders issued in Rg 46 P.H. 7-1-30 (N)

16.1.30.

3. Provision of funds: A sum of Rs 39,750 has been provided for a grant for this work in Part II of the budget for 1930-31. The detailed estimate for the work now amounts to Rs 58,000. & the half grant admissible is Rs 29,000. This amount may be included in the note for the Cabinet on Part II schemes.

16.1.30

Through B.E. III. (B.E 30-31)

16.1.30

Thro' Budget (Genl.) 18.1.30 — 18.1.30

A.S. 20.1.30 — 20.1.30

20.1.30

No. 1140 Exp/1 21.1.30

The file should go to L.S.G. (P.H.) to whom it may be returned.

21 JAN 1930 (265) SECRETARIAT DEPOT

21/1

Pub. Wks. 1265 c/30-1 22-1-30

22

(1·1) L.S.&C.P.W. Dept.

With reference to the suggestion of the H.E's orders may first be obtained for Cabinet circulation.

D.S. Engrs



02912

Bom 22/1

Mad 22·1·30

.. Put up a pch note ..
here stating the points for Cabinet.

Sec'y M L HE

D.S.

The question for consideration is whether the Bellary Water Supply Extension Scheme should be carried out by the Local Engineering staff or by the P.W.D. In para.1 of the Cabinet decision dated 22-6-1923, it has been laid down that for the present the P.W.D. should be employed in connection with the execution of all Water Supply and Drainage Schemes. The proposal to entrust the execution of the Bellary Water Supply Extension Scheme to the Council is recommended by the Sanitary Engineer. He reports that the Council hasin its service a qualified engineer who is competent to carry out the work. The Chief Engineer has not raised any objection to the Sanitary Engineer's recommendation. The Cabinet have agreed to similar proposals in the case of the Gudur Water Supply Scheme and the Tanjore Water Works Improvement Scheme. In the case under consideration the work will be supervised by the Sanitary Engineer and the Government grant will be given only if the Sanitary Engineer has certified that the work has been properly carried out. H.E.'s orders may therefore may be obtained as to whether the case may be circulated to the Hon'ble Members, Hon'ble Ministers and H.E. for a decision.

B.P.K.
30-1-30.
M.T.D.
30-1-30.

Sec'y

Bom 22/2

Mad 6.2.30

M L HE, Cabinet circulation
21.2.30

24m 18.

23

Please see the note at the previous page.
The permission of the Cabinet is sought for the work to be done by the Local Engineering Staff.

Secy.

27/2

25/2

25.2.30

M2 ... 2.30

M3 ... 3.30.

M1 5/iii

C4 8.3.30

C3 8.3.30.

C2 9/3/30

C1

K2. 11.3.30

10/3/30

SECRETARY TO GOVT. 11 MAR 1930 L.S.G. DEPT.

LSG(PA) Dept

Government to issue

The draft order may now issue.

14/3

12/3

13/3

12.3.30

Sectt. II-5 (b)—9,906—9-11-26 (6)

21

L.S.G.(P.H.) DEPARTMENT.

	Date.	Initials.
When received for Fair-copying.		
When copied ..		
When examined ..		
When signed ..		
When despatched ..		

READ AGAIN G.O. No. ....., dated ..... 192 .

" " " " ..... " ..... 192 .

READ ALSO:—

C. No.45561 From the C.M.C., Bellary, No. 1960, dated 7-11-1929.

" " 53820 " " Sany.Engineer " 725-C., " 26-11-1929.

" " Endt. " "Chief Engineer " 5913-Wks.-29 4-12-1929.

ORDER.

No....., dated ..... 192 .

Ms.

(B)

In G.O. No. 1797 P.H., dated 18-7-29, Government sanctioned the preparation of plans and estimates for a scheme to extend the water supply distribution system of Bellary to Brucepet. The Sanitary Engineer has now submitted a detailed estimate for the scheme amounting to Rs. 58,000. The Government are pleased to sanction this estimate.

2. The Chairman has requested that the execution of the work may be entrusted to the Municipal Council as it has in its service a qualified engineer competent to carry out the work and the Sanitary Engineer has recommended the proposal. The Government are accordingly pleased to sanction the proposal, subject to the condition that the work is supervised by the Sanitary Engineer.

3. Subject to the provision of funds, the Government will make a grant of half the cost of the scheme. The other half should be met by the Municipal Council. The question of the provision of funds is being considered in connection with the Civil Budget Estimate for 1930-31. The entire expenditure must however be met by the Municipal Council from its own funds in the first instance.

A.D.C.
7-1-30.

⊗ Part II Scheme for 1930-31. File Not found

To

The C.M.C., Bellary (~~with estimates~~).
" Sanitary Engineer.
" Chief Engineer.
" P.W.D.
" Finance Department.

Sec' I-5 (a)—48,004—6-11-28. (6)

3/5/30

26 ~~192~~

L.S.G(P.H) DEPARTMENT.

	Date.	Initials.
When received for Fair-copying.		
When copied ..	15/3.	
When examined ..	15/3	
When signed ..		
When despatched ..		

READ AGAIN G.O. No ..... , dated 192

" " " " ..... " 192

READ ALSO:—

C. No. 45561 From the C.M.C. Bellary , No. 1960 , dated 7-11 192 9.

" " 53820 " " San^y Eng^r " 725-9 " 26-11 192 9.

" " Enc^l " " Chief Eng^r " 5913-Wks-29 " 4-12 192 9.

ORDER.

No. 595 PH , dated 15/3/30 ~~192~~ .

M/s

(B)

~~Read having~~ ~~the~~ ~~letter~~ G.O.N^o 1793 P.H. d 18-2-29 Govt sanctioned the preparation of plans and estimates for a scheme to extend the water supply distribution system of Bellary to Bruceput. The San^y Eng^r has now submitted a detailed estimate for the ~~above~~ scheme ~~for~~ Amounting to Rs 58,000 ~~only~~. The Govt are pleased to sanction this estimate.

2. The Chairman ~~has~~ requested that the execution of the ~~above~~ work may be entrusted to the

46-16 Pt.

14/3

A.C.f

Municipal Council as it has in its service a qualified engineer ~~Council~~ Competent to carry out the work and the Sanit Engr has recommended the proposal. The Govt are accordingly pleased to sanction the proposal, subject to the condition that the work is supervised by the Sanit Engr.

Subject to the provision of funds, the Govt will make a grant 3. ~~The expenditure on the above scheme shall be shared equally by the Govt and the M Council.~~ of half the cost of the scheme the other half should be met by the Muni Council.

~~A question is being considered in connection with the R.B.E for 1930-31. The entire expenditure must however be met by the Muni funds in the first instance.~~ The question of giving a subsidy of Rs 12000 (*) — ~~of half the cost of the scheme~~ ~~due towards the Govt share~~ ~~and whether the cost~~ is being considered in connection with the R.B.E for 1930-31. The entire expenditure must however be met by the Muni funds in the first instance.

(*) The provision of funds

(file worthy)

6/1/30

7.1.30.

Dpd. by Van / Post / Messenger 1

Dpr's. initials

Dpd. 15/3/30.

17

To

The C.O.R. Bellary

The Sanit Engr

The Chief Engr

The P.W.D.

The Finance Dept.